


CONVENTIONAL / STANDARD

CONVENTIONAL FRONT - DEMOLITION (STRAIGHT) & BACKHOE (CURVED) POSITIONS							
BASE MACHINE WEIGHT		mt	29-30	35-36	45-46	65	
SIZE OF ARM USED FOR ENVELOPE CALCULATION		1,000 lbs	64-66	78-80	100-102	144	
DEMOLITION BOOM CONFIGURATION	MAX. PIN HEIGHT	A	m	3.1	3.2	3.4	3.5
		ft	10.0	10.5	11.0	11.5	
	MAX. PIN DEPTH	B	m	12.2	13.0	13.5	14.2
		ft	40.0	42.8	44.2	46.6	
	MAX. FORWARD REACH	C	m	5.3	4.9	4.2	5.8
		ft	17.5	16.2	13.7	19.2	
BACKHOE BOOM CONFIGURATION	MAX. PIN HEIGHT	D	m	11.0	11.6	11.9	12.6
		ft	36.1	38.1	38.9	41.4	
	MAX. PIN DEPTH	E	m	8.6	9.6	9.8	10.0
		ft	28.4	31.5	32.1	32.8	
	MAX. FORWARD REACH	F	m	6.6	6.6	6.1	7.1
		ft	21.5	21.6	20.0	23.3	
			m	9.8	10.4	10.6	11.0
			ft	32.1	34.0	34.7	36.0

These values are for reference only! We pride ourselves on the ability to develop solutions to meet individual customers requirements.



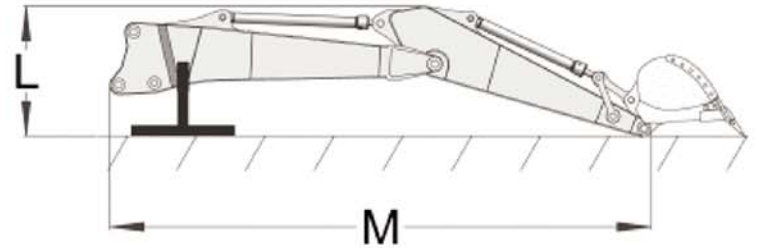

TRANSPORT DIMENSIONS - STANDARD EQUIPMENT IN CRADLE						
OVERALL HEIGHT	L	m	1.8	2.0	2.0	2.1
		ft	5.7	6.4	6.4	7.0
OVERALL LENGTH	M	m	7.3	7.9	7.7	8.4
		ft	24.1	25.8	25.3	27.4
WEIGHT (WITHOUT ATTACHMENT)		kgs	3,650	4,600	5,400	8,800
		lbs	8,047	10,141	11,905	19,401

LEMAC
ENGINEERING

UK / EUROPE

Email: uksales@lemaconline.com
Phone: +44 (0) 1259-751573

Website: www.LemacOnline.com

LEMAC
CORPORATION

US / CANADA

Email: sales@lemaconline.com
Phone: 1 (804) 862-8481

Distributed By:

(Attach Business Card Here)